

次世代ファイアウォール USG シリーズ

「WAN 側から WEB_GUI へのアクセス設定」について

1. 背景

WAN 側から USG に対してアクセスする場合、従来は HTTPS で WEB GUI を開くことはデフォルトで許可されていました。ファームウェア V4.25 Rev.1 以降では、デフォルトで不許可になっています。つまり、特に設定を行わなければ、インターネット経由で USG シリーズの WEB GUI を開くことができません。

ファームウェアをアップグレードした場合、元の設定が残りますので、従来 WAN からの WEB GUI アクセスを認めていたのであれば、そのままの設定でお使いになることができます。リセットして工場出荷状態に戻すと、そのままでは WAN 側から WEB GUI を開くことができなくなりますのでご注意ください。

2. 設定方法 1

従来通り WAN から WEB GUI へのアクセスを許可するには、Policy Control で WAN 側から ZyWALL に対して HTTPS でのアクセスを許可するルールを追加する必要があります。

設定手順

- ① CONFIGURATION -> Security Policy -> Policy Control を開く
- ② Add をクリックする
- ③ 開いたウィンドウで、以下の項目を以下のように設定する
 - From: WAN
 - To: ZyWALL
 - Service: HTTPS
 - Action: allow
- ④ OK をクリックする

ZYXEL USG40

Welcome admin | Logout | Help | About | Site Map | Object Reference | Console | CLI | Easy Mode

CONFIGURATION

- Quick Setup
- Licensing
- Wireless
- Network
 - Interface
 - Routing
 - DDNS
 - NAT
 - Redirect Service
 - ALG
 - UPnP
 - IP/MAC Binding
 - Layer2 Isolation
 - DNS Inbound LB
 - IPF
 - Web Authentication
 - Security Policy
 - Policy Control**
 - ALU
 - Session Control
- Cloud CNM
- VPN
- BWM
- UTM Profile
- Object
- System
- Log & Report

Policy

Show Filter

General Settings

Enable Policy Control

IPv4 Configuration

Allow Asymmetrical Route

Prio...	Sta...	Name	From	To	IPv4 Source	IPv4 Destin...	Service	User	Schedule	Act...	Log	UTM Profile
1		LAN1_Outgoing	LAN1	any (Exclud...	any	any	any	any	none	allow	no	
2		LAN2_Outgoing	LAN2	any (Exclud...	any	any	any	any	none	allow	no	
3		DMZ_to_WAN	DMZ	any	any	any	any	any	none	allow	no	
4		IPSec_VPN_Outgoing	IPSec_VPN	any (Exclud...	any	any	any	any	none	allow	no	
5		SSL_VPN_Outgoing	SSL_VPN	any (Exclud...	any	any	any	any	none	allow	no	
6		TUNNEL_Outgoing	TUNNEL	any (Exclud...	any	any	any	any	none	allow	no	
7		LAN1_to_Device	LAN1	ZyWALL	any	any	any	any	none	allow	no	
8		LAN2_to_Device	LAN2	ZyWALL	any	any	any	any	none	allow	no	
9		DMZ_to_Device	DMZ	ZyWALL	any	any	Default_Al...	any	none	allow	no	
10		WAN_to_Device	WAN	ZyWALL	any	any	Default_Al...	any	none	allow	no	
11		IPSec_VPN_to_Device	IPSec_VPN	ZyWALL	any	any	any	any	none	allow	no	

Edit Policy1

Create new Object

Enable

Name: WAN_to_Device_HTTPS

Description: (Optional)

From: WAN

To: ZyWALL

Source: any

Destination: any

Service: HTTPS

User: any

Schedule: none

Action: allow



Log matched traffic: no

3. 設定方法 2

プリセットされている WAN to Device の service に HTTPS を追加しても、同様の効果があります。

設定手順

- ① CONFIGURATION -> Object -> Service を開き、Service Group タブをクリックする
- ② Default_Allow_WAN_To_ZyWALL をダブルクリックする
- ③ 開いたウィンドウで、Available のリストボックスをスクロールして「HTTPS」をクリックする
- ④ 右矢印のボタンをクリックし、HTTPS が右側の Member のリストボックスに移動したことを確認する
- ⑤ OK をクリックする

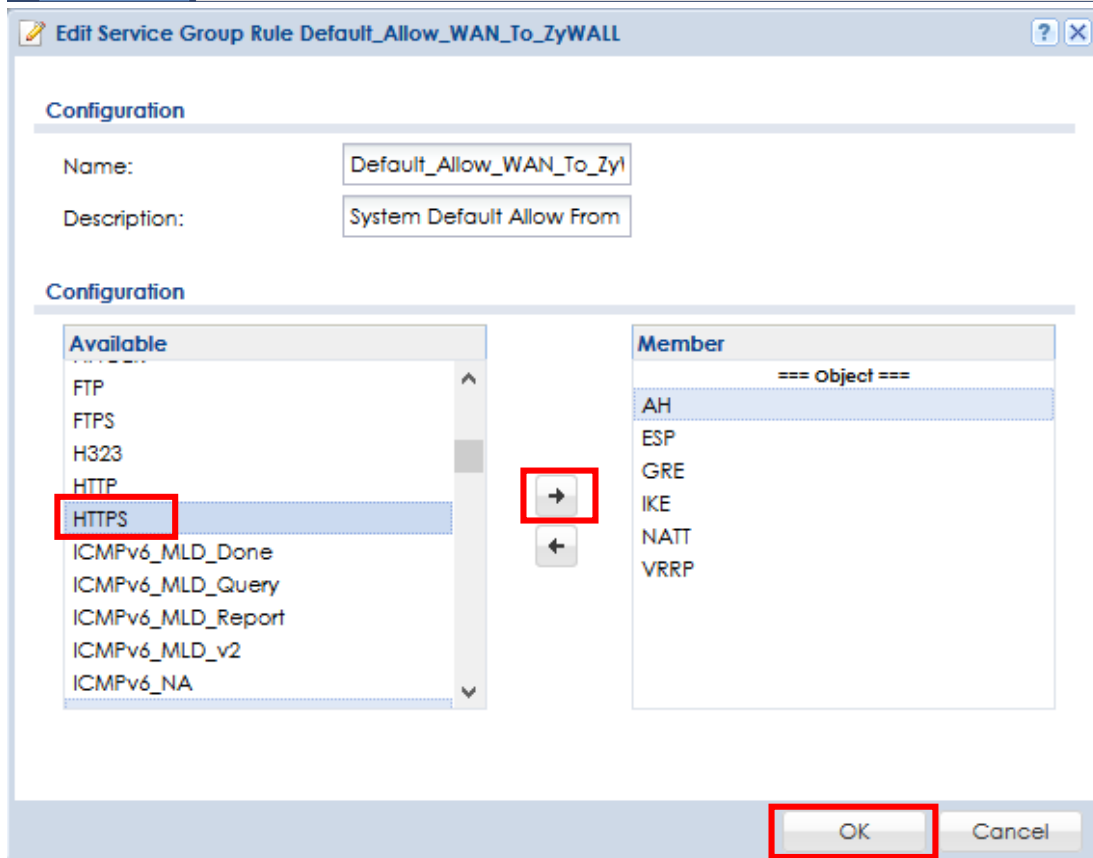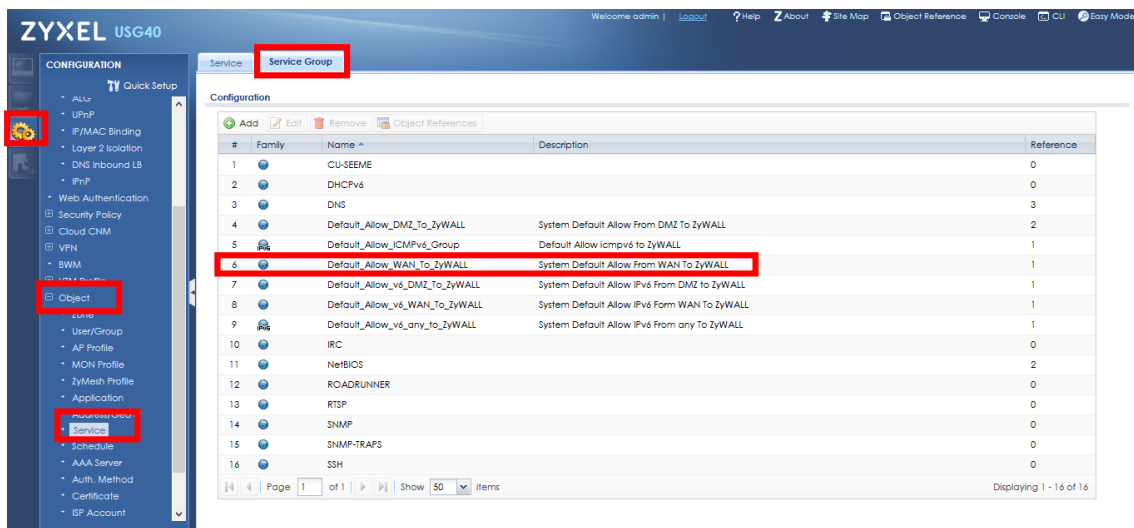

※本文書は WAN 側から WEB GUI にアクセスする方法を説明することを目的とした文書です。本設定によりセキュリティ上の問題が発生する場合があります。本文書の設定の使用及び使用結果について、弊社では一切の責任を負いません。お客様の責任により利用してください。

以上になります。